




1. Name and Parts




1. On/Off/Power Saving Switch
2. Power LED(Blue)
3. USB Port
4. GPS Indicator
5. USB Port Lid
6. Memory Card Slot


2. Package Content




Memory Card




Rectangle Jelly Case




Quick Guide




Magnetic Holder



Round Jelly Case






CD-ROM



USB Cable

1



3. Charge Battery



Charge LED(Red)
When battery is fully charged,
the red LED will turn off.

1. Remove the USB Port Lid and connect with the supplied USB cable to the device.
2. Connect the other end of the USB cable to a PC or an USB charger.
3. The red LED at the bottom of the device will illuminate when charging and turn off when fully battery is fully charged. Charging time takes about 150 minutes to complete.


4. Assemble & Disassemble



1. Place the device into the Rectangle Jelly Case. Note the metal side should be facing inside the jelly case and plastic side (with product serial number visible) facing outside.



1




2



3

2. As shown in illustration 1, twist the Magnetic Holder counterclockwise to open the unit.
3. Place the plastic side of device into the chamber of the Magnetic Holder as shown in illustration 2. The GPS antenna is mounted on the plastic side of the device. It is very important to place correct side into the chamber for best GPS signal reception.


2



4. Re-assemble the Magnetic Holder as shown in illustration 3. Make sure the holder is securely assembled for weather proof purpose.




4




5

5. Wrap the Magnetic Holder with Round Jelly Case.
 6. To remove the device from Magnetic Holder, unwrap the Round Jelly Case first then disassemble Magnetic Holder as shown in illustration 4 & 5.
- ※ For better GPS signal reception, it is recommended to place the unit near four corners inside a vehicle or in the rear trunk or attached to the chassis.

5. Operation



GPS Indicator (Blue)
When the device detects satellite signal,
blue indicator blinks once every 20 seconds.




1. Insert memory card to the memory card slot on the side of the unit.
2. Select Power On or Power Saving by sliding switch to position. To Power On the device, slide switch to position (1). To enter Power Saving Mode, slide switch to position (2). Blue indicator blinks when the device is in operation.
3. When the device detects satellite signal, blue indicator blinks once every 20 seconds. When battery is fully charged, the device would work for approximately 20 hours.

Note: In Power Saving Mode, the device would stop recording data if no vibration is detected within 10 minutes. The device would resume to normal operation again when a vibration is detected.

* To retrieve the data, install software from the provided CD to your computer. Software installation guide is in the CD too.

3

GPS-DLG10 GPS Data Logger Quick Guide

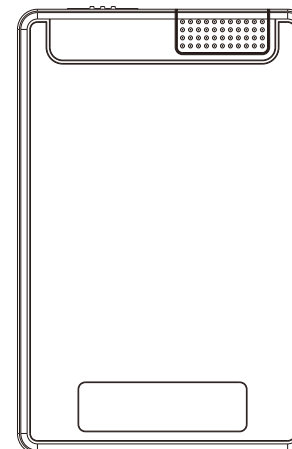

Law Enforcement Products Manufacturer
LawMate

V1.0