


HD 1080P Eyeglasses Security Wi-Fi Camera

User Manual

Version: Sep,2017



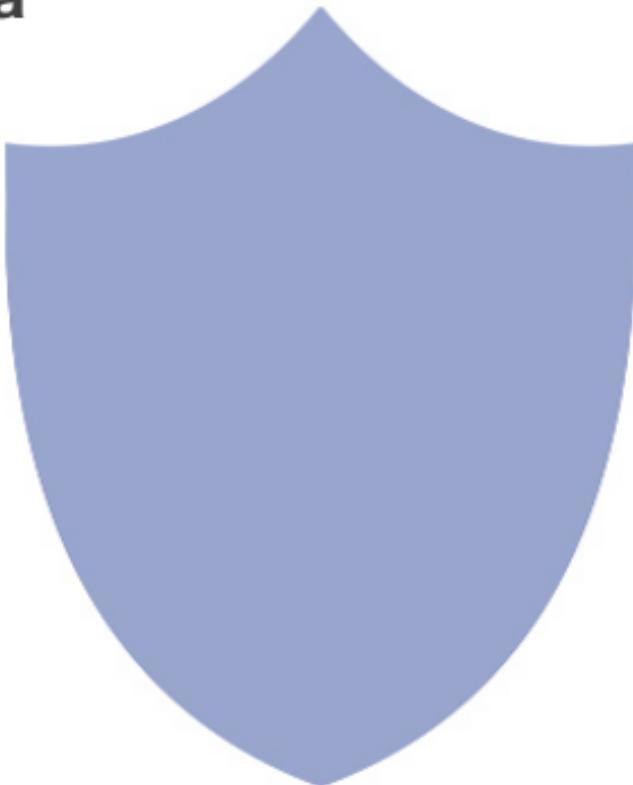



Quick guide of Wi-Fi camera function:

- 1.Download Free App **Pro iCam** from App Store or Google Play.
2. Press ON/OFF button, wait for around 1 minute;
- 3.Enter smartphone setting → Search and connect device's wifi named: CM.....,wait till phone status bar appear Wi-Fi  symbol;
- 4.Enter APP, press top right "  "icon --> Select camera→ Press Ok → Camera Online then;
TIPS: 1.Please select **【Change】** to change device password for security **【default: 8888】** ;
2.This step = P2P mode, can check video locally when without Wi-Fi.
5. Press gear icon after camera → Device Settings → WiFi Config →Select your Wi-Fi → Input password → Press Ok;
- 6.Quit APP , wait 30 seconds (device restart automatically)and connected with your setted Wi-Fi ;
- 7.Enter APP to check live video locally or remotely anywhere.
P.S.: Contact local dealer for video guide setting up.

Overview:

The HD 1080P Eyeglasses Security Wi-Fi Camera is normal eyeglasses, but with an integrated smart & powerful 1080P Wi-Fi hidden camera.

First, it can be easily connected to Wi-Fi and watch live video, or remotely take photo and video by APP in smartphone anywhere in the world; Also, it supports Point to Point (P2P) function, connected by APP to smartphone for local live video without Wi-Fi.

Second, it also support motion detect alarm function, cycle recording and work when charging.

Usages: Nanny camera, Home/ Shop/ Office/ Warehouse surveillance camera.....

In the box:

1x Eyeglasses Wi-Fi Camera
1x USB Cable

1x Mirco SD Card Reader
1x User Manual
1x CD Driver

Product structure:



- 1. Camera
- 2. Micro SD card slot
- 3. Indicator light
- 4. On/Off button

- 5. Microphone
- 6. USB port
- 7. Reset Button

Getting started of Wi-Fi camera part

Step1: Download and install APP

Scan below QR code or search and download free APP named "Pro iCam" in Apple APP store, Google play or Electronic market, and install it.




[Pro iCam] APP QR code

Step 2: Press ON/OFF button, wait for around 1 minute:

Step 3: Connect WiFi



1. Open smartphone setting, search and connect the device's wireless signal named "CM.....", wait Wi-Fi connected, and phone status bar appear Wi-Fi  symbol.
2. Open APP, press symbol + at the top right corner, select "Add new online Camera". Search for new camera and press ok. Then back to the first page to see the live video of camera and do the following setting.




QR Scan  OK



TIPS: 1. Please select 【Change】 to change device password for security 【default: 8888】;

2. This step = P2P mode, can check video locally when without Wi-Fi.

3. Press the gear icon  after the camera or long press the camera and select Device Settings ,select WiFi Config.

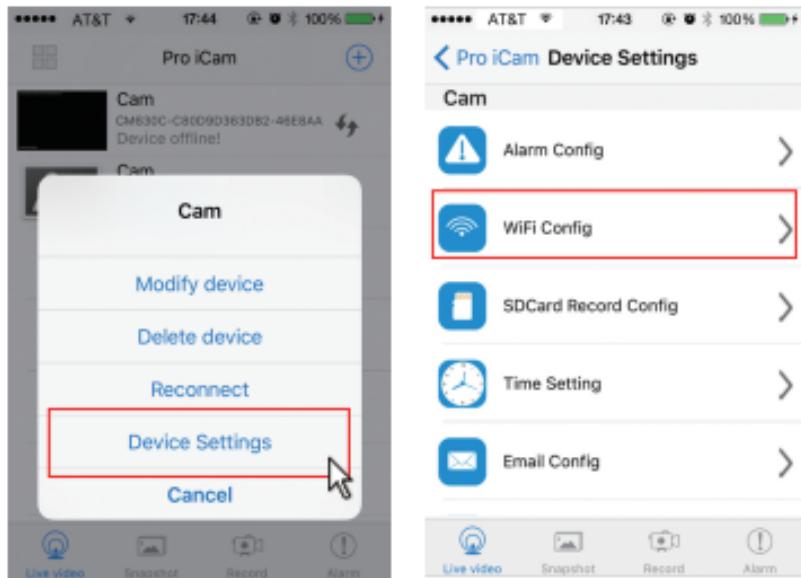

4. Select your Wi-Fi and input passcode, camera will be connected to your Wi-Fi. Your smartphone will disconnect the signal from device and connected to your Wi-Fi.


5. Quit APP, and device restart automatically and ready again in 30 seconds.

6. Enter APP and check live video locally or remotely anywhere.




Set camera name and private code

Set name: Press the  after the camera or long press the camera, select Modify device, select Name and insert name like Office, Room.....

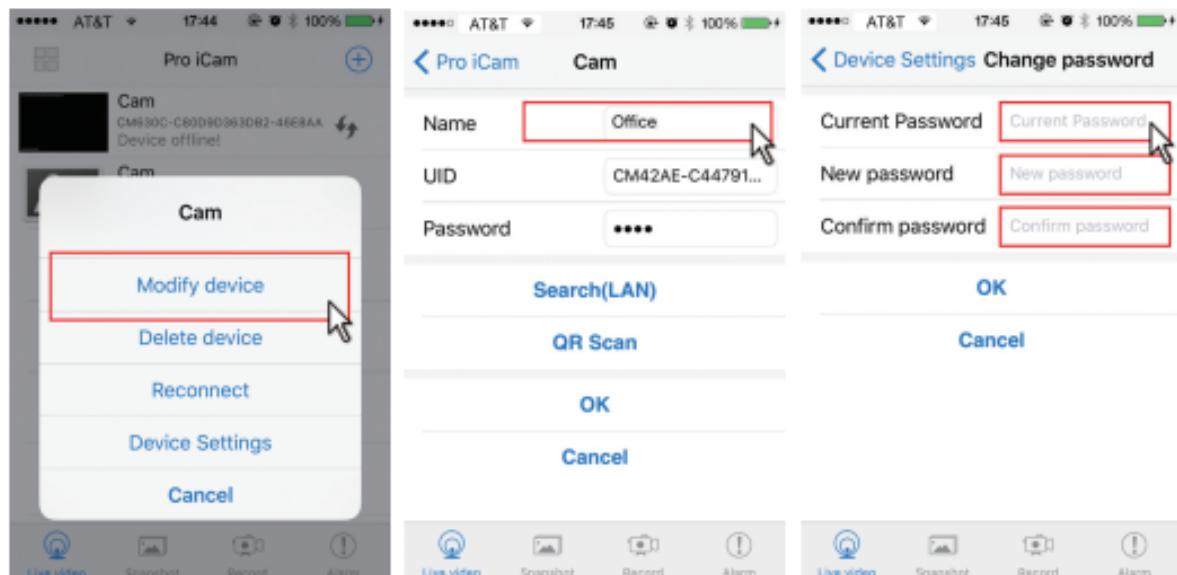


Set code: Long press the camera and select Device Settings ,select Change password. Current one is 8888.

APP introduction:

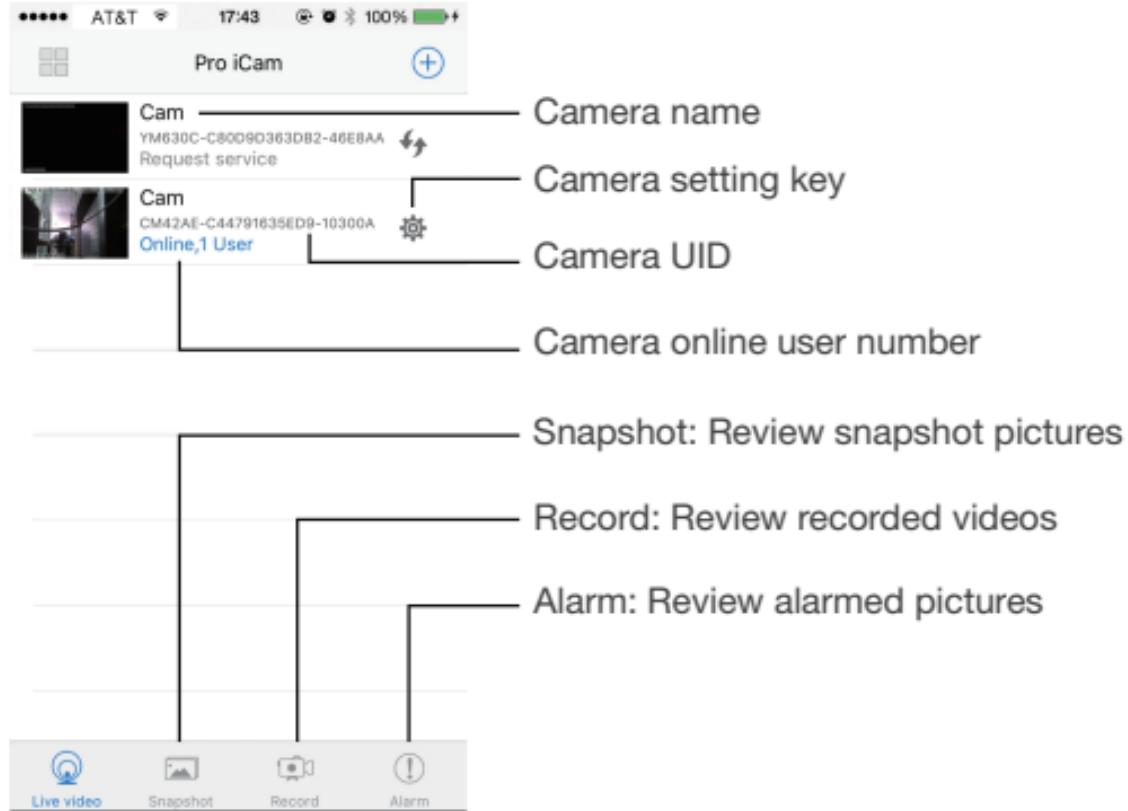

Live video page - Click camera to check

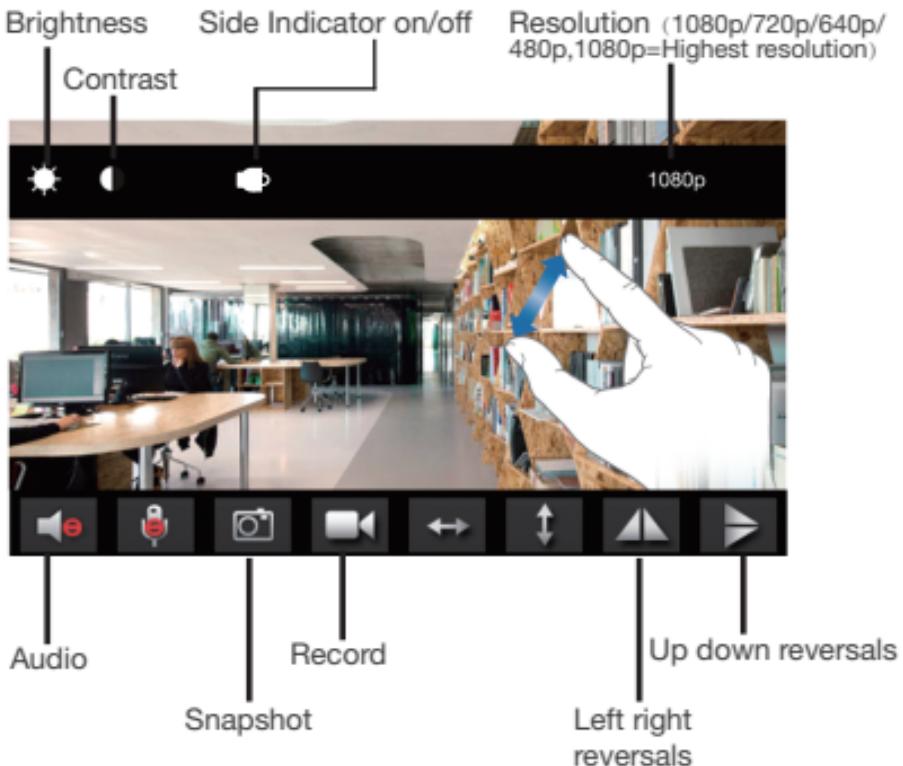

◀ Pro iCam Device Settings

Cam



Alarm Config

➤ Alarm Config: Set motion detection sensitivity / Alarm interval



WiFi Config

➤ Wi-Fi Config: Set camera to other Wi-Fi



SDCard Record Config

➤ SD Card Record Config: Set SD card record mode / Resolution /File length ...



Time Setting

➤ Set time



Email Config

➤ Set motion alarm with email (Need turn on Email Alert first in Alarm Config)



Change password

➤ Change password: Set camera new password



Device reboot

➤ Device reboot: Restore to factory default setting



Live video



Snapshot



Record




Alarm


TIPS: Each setting in Device Settings, please scroll down and press ok to save the setting.

Set and watch by PC in LAN

- Once camera connected well with Wi-Fi, install software “IPCamera” from included CD and open software to find the connected device’s IP address.

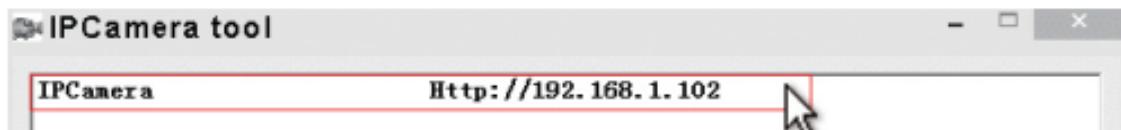

- Double click the IP address, insert name “admin” (no password) and press ok.

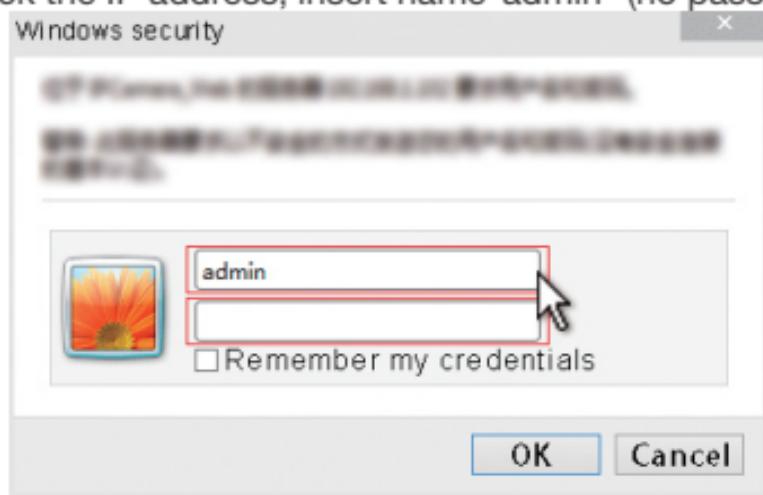

3. After above steps, you can insert setting interface. For first use, please choose language, then click  to download and install plug-in.

IPCam | 2014
Ver 1.7.23.23 HD

Welcome to Use IP Camera

3

Browser plug-ins
Recommended browser plug-in, support for real-time video and audio playback, compatible with Windows platforms common browsers.

2

IE ActiveX Plug-in. Click to download


1

Language : English 




4. Click  to go to the final setting interface.

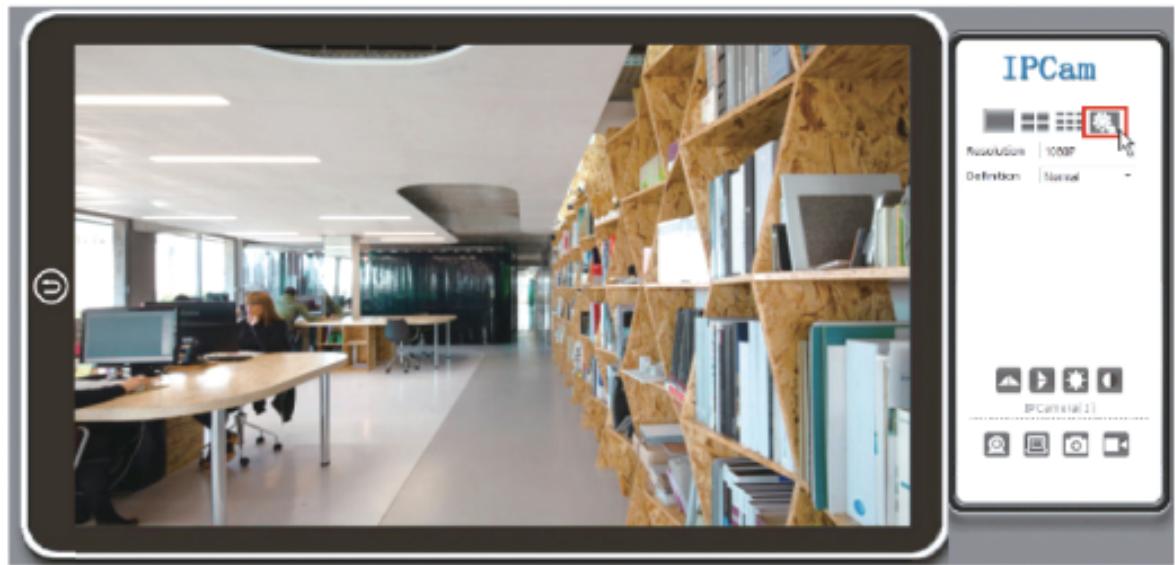

5. Click left options to set other needed functions.

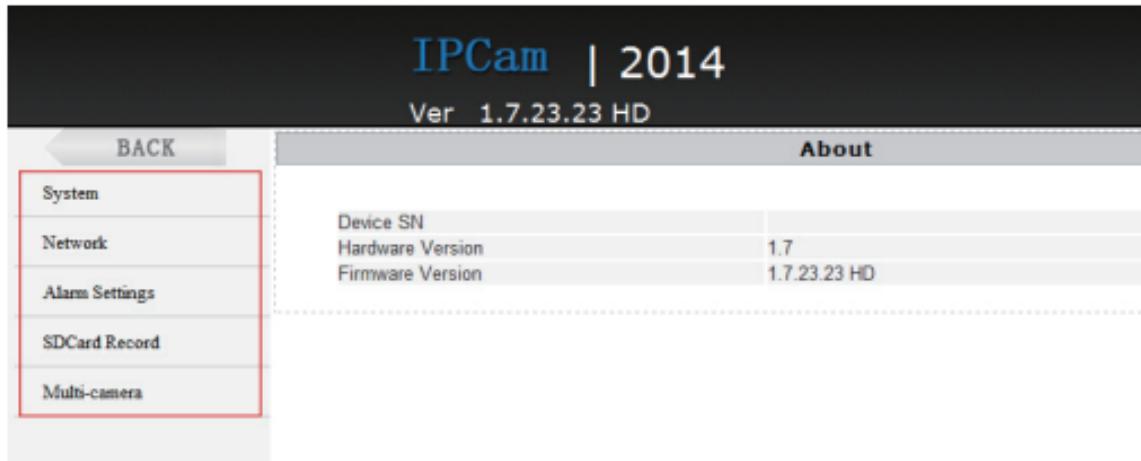

6. Click left side System --> About, to check wifi camera's firmware version.

Set and watch by PC remotely (Not in LAN)

Please check details in included CD for instructions and software.

Specification

Resolution	1 Mega CMOS
Video pixel in phone	Max 1920*1080
Frames	Max 25fps
P2P distance	Around 20 meters without block
Compressed format	H.264
View angle	90°
Type of memory card	TF card>=Class 4/10 and HC marked
Maximum capacity of memory card	128 GB
PC operation system	Windows 7, 8 / Mac OS X
Play software	VLCPlayer/SMPlayer
Mobile phone operation system	Android/iOS
Web browser	IE7 and above,chrome,firefox
Battery capacity	220mA
Recording	1 minute/ around 18 MB
Charging time	1-2hours if with 5V 2A adapter
Working time	around 40mins
Work when charging	Support

FAQ

1. Q: Can't get device Wi-Fi signal? (Three solutions FYI).

- A: 1). Plug off and plug into power again;
2). Press reset key for 5 seconds and wait 2 mins;
3). Turn off smartphone Wi-Fi for a while, then turn on to search again.

2. Q: Can't add or set camera after connected with camera Wi-Fi?

- A: Please wait phone status bar appear Wi-Fi  symbol, then to do follow settings.

3. Q: Why live video screen shows up black and a searching circle spins in center but nothing ever displays?

- A: 1). If camera's connected Wi-Fi speed is slow, please wait 10-30 seconds for live video appear;
2). One click middle of screen, select top right 480p resolution to check.

TIPS: If local Wi-Fi speed is slow, please choose lower resolution for good video and audio.

4. Q: Live video not smooth and clear?

A: Select suitable resolution according to the real time network environment.

5. Q: How many cameras can be added to APP?

A: No limit.

6. Q: How many visitors support to check live video?

A: 1-2

7. Q: Only 1 user, but show 2 or more users?

A: 1). If login in very often, last record is still in. If check every 2-5 mins, surely will be the exact numbers of users;
2). To be safer, please change camera's password when first use (Page 9).

8. Q: Motion detect set and alarm?

- A: 1). Set motion detect sensitivity in Device Settings - Alarm Config, and scroll down press OK;
2). When motion detected, camera will push a alarm message to your phone and take 3 pictures for checking in the APP [Page 10 - Alarm - ].

Alarm

9. Q: Micro SD card instruction?

- A: 1). Format card before inserting;
2). Once connected, can set SD management in app [Device Settings - SD Card Record Config].

10. Q: How to play micro SD card video?

- A:1). Use a card reader to read and play;
2). Use APP to play back [Page 10 - Record - ];
3). Play back in good speed network.



11. Q: After connected to Wi-Fi, how is the status of camera when Wi-Fi off?

- A: 1). If modem off, camera can still check local view as it is connected directly to wireless router;
2). If both modem and router off, camera will keep searching the connected Wi-Fi and connect again;
3). If above point 2, not connect; Just plug off and plug on again to connect Wi-Fi.

12. Q: Camera can't hold set Wi-Fi, lost contact and offline?

- A: 1). Make sure camera inside the range of good Wi-Fi signal;
2). Low battery, check if power adapter connected properly for long time use.
3). Make sure your phone network(4G/Wi-Fi)work well in remote area when checking the camera;
4). Please try to add with another phone which with good network.

13. Q: Forget camera password, or item goes abnormal?

A: Plug in power, turn on camera and wait for 2 minutes ,
press reset key around 5 seconds till right LED light off
to restore factory default. Camera restarts and get ready
again in 2 minutes.

14.Q: App content similar but not exact same as in manual?

A: App is always being optimized with better interface and
functions.

15. Q: Any operation video demo of the camera for setting up?

A: Please contact local dealer for video guide.

The End!